

FAQ


Grinder

[Ceramic Coffee Mill_MSCS-2]

Q. How do I assemble the Ceramic Coffee Mill (MSCS-2)?

A. Follow the assembly instructions below.



(1) Assemble the parts in the correct order.

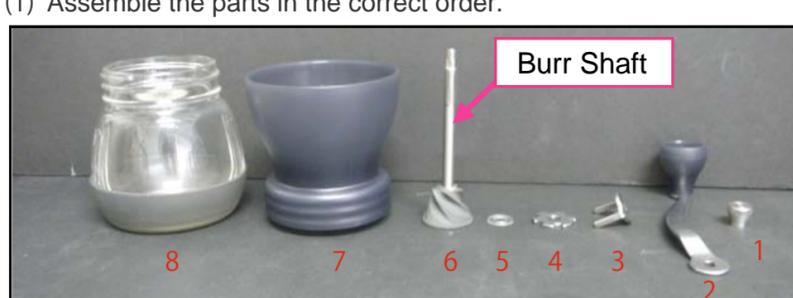

In order from the right hand side,



- 1 Fixing screw
- 2 Handle
- 3 Stopper
- 4 Grind adjustment nut
- 5 Washer
- 6 Burr
- 7 Hopper
- 8 Glass bowl

(2) Insert the burr from the bottom side of the hopper, pass the burr shaft section through the central hole, and slide the washer onto the top of the shaft section.

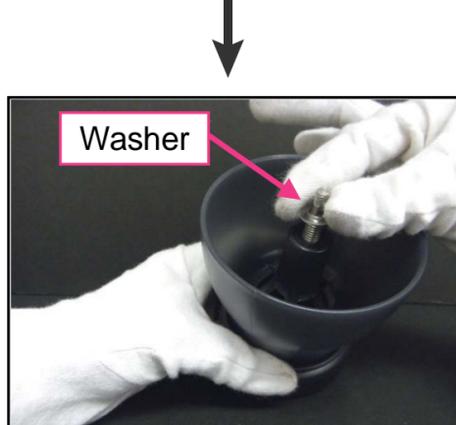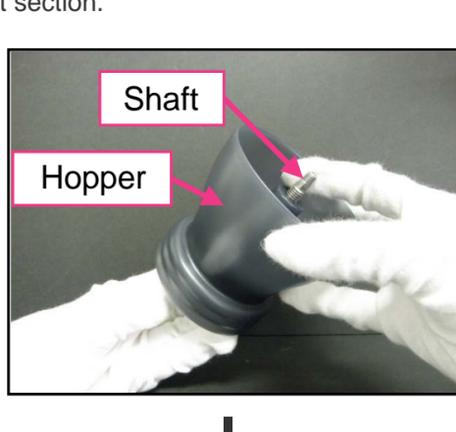


(3) Adjust the coarseness of grinds by fully tightening the grind adjustment nut, and then turn to loosen it (counter-clockwise) by one notch at a time.

***With the cut section (flat section) of the tip of the shaft facing forwards, align the indent of the grind adjustment nut with the cut section, then rotate one notch at a time to adjust the grind by the number of notches rotated.**

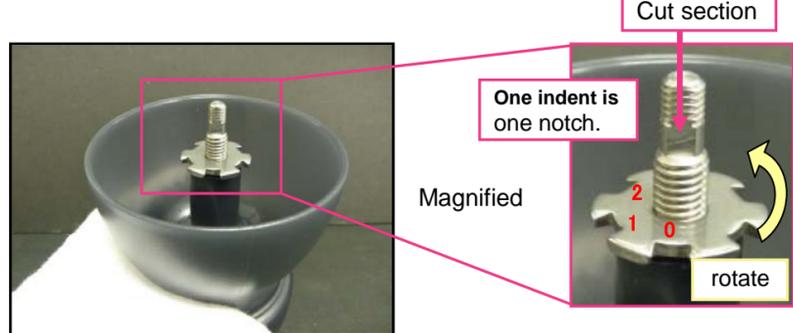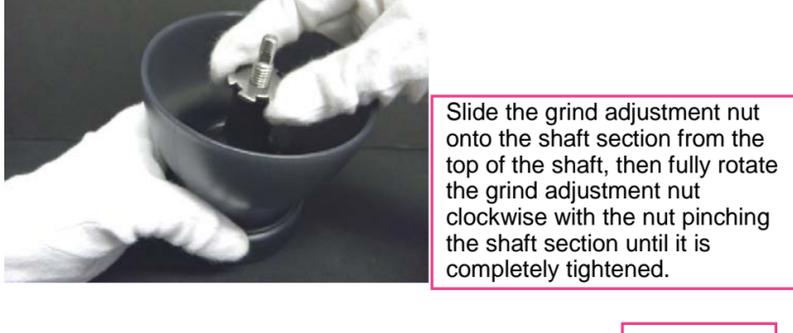


(4) When the coffee ground coarseness has been adjusted, put the stopper onto the top of the shaft section to fix in place.


(Fit the foot of the stopper into the indent. Set here when attaching the cover.)

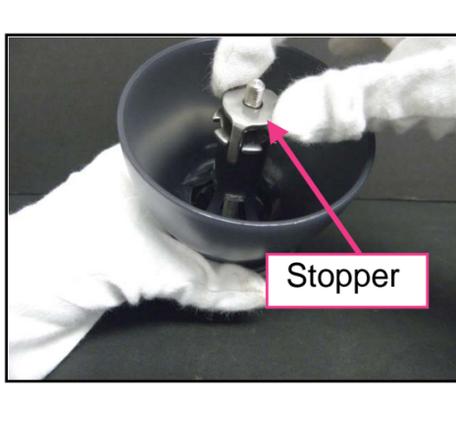

(5) Put the handle onto the shaft and tighten the fixing screw to complete assembly of the parts and adjustment of the coffee grind size.

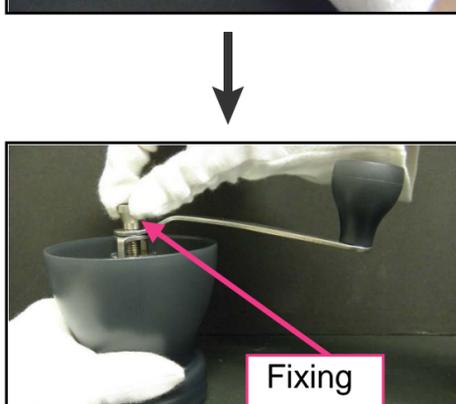

(6) Attach the hopper to the glass bowl, then place coffee beans into the hopper.

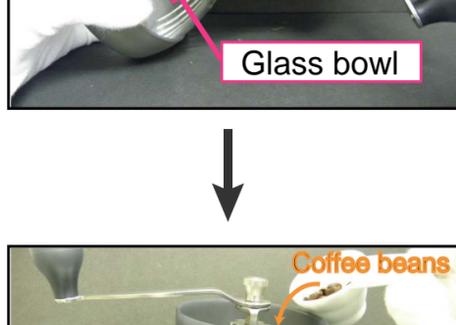

(7) Turn the handle clockwise to grind the coffee beans.

