

FAQ

Grinder

[Coffee Mill "Column"_CM-502C]

Q. How do I assemble the Coffee Mill "Column" (CM-502C)?

A. Follow the assembly instructions below.

(1) Assemble the parts in the correct order.



In order from the right hand side,

- 1 Fixing screw
- 2 Handle
- 3 Stopper
- 4 Grind adjustment nut
- 5 Washer
- 6 Burr shaft
- 7 Hopper
- 8 Bottle

(2) Insert the burr from the bottom side of the hopper, pass the burr shaft section through the central hole, and slide the washer onto the top of the shaft section.




(3) Adjust the coarseness of grinds by fully tightening the grind adjustment nut, and then turn to loosen it (counter-clockwise) by one notch at a time.

***With the cut section (flat section) of the tip of the shaft facing forwards, align the indent of the grind adjustment nut with the cut section, then rotate one notch at a time to adjust the grind by the number of notches rotated.**



Slide the grind adjustment nut onto the shaft section from the top of the shaft, then fully rotate the grind adjustment nut clockwise with the nut pinching the shaft section until it is

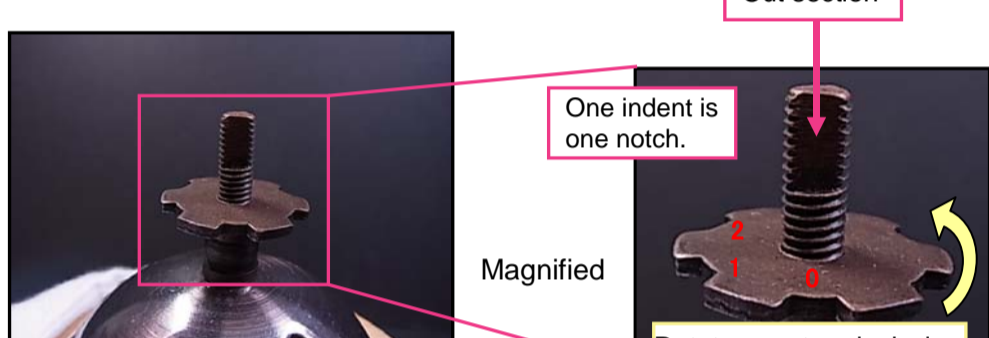



(4) When the coffee ground coarseness has been adjusted, put the stopper onto the top of the shaft section to fix in place.

(Fit the foot of the stopper into the indent.)




(5) Put the handle onto the shaft and tighten the fixing screw to complete assembly of the parts and adjustment of the coffee grind size.

***Set so that the knob of the handle is above the stopper foot as shown in the photograph.**

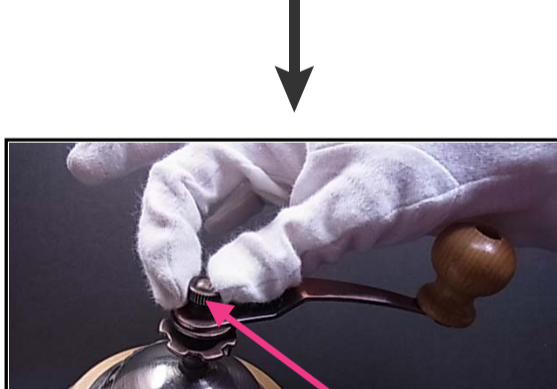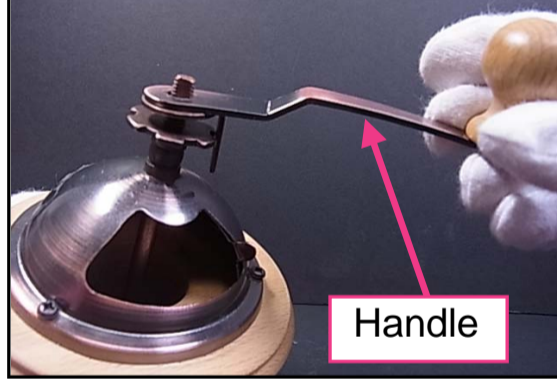

(6) Attach the hopper to the bottle, place coffee beans into the hopper and close the lid.

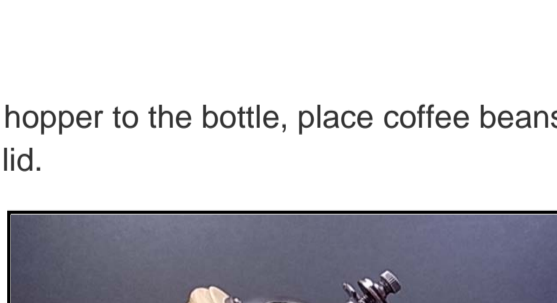

(7) Turn the handle clockwise to grind the coffee beans.

